

Quadro[®]M-E1/T1



QuadroM E1-T1 Dual Port Gateway

Expanding Call Capacities for an Expanding Business

The QuadroM E1-T1 Dual Port Gateway continues the Epygi tradition of "smart", affordable VoIP products geared to helping businesses bridge the gap between Internet Telephony and PSTN. Featuring double the call capacity of the QuadroM E1-T1, it helps businesses expand their phone systems with improved sound quality and performance. Thirty channels of compressed codec on the QuadroM E1-T1 30 and sixty channels on the QuadroM E1-T1 60 with new architecture to insure these improvements as well as offering better application integration.

The QuadroM includes call routing and auto attendant capabilities, as well as voice prioritization over data and sophisticated firewall and security elements. It is constructed with sturdy rack mountable housing that permits the inclusion of a built in power source and cooling fan for heavy duty operation and extended life span. In all, a powerful choice for growing companies seeking to maximize the benefits of VoIP.

IP Enable your Legacy PBX

Epygi offers cost effective additions to an existing telephony network to bring the true benefits of VoIP to you. Integrating a QuadroM E1/T1 Gateway into an existing network will allow for inexpensive communication between multi-site locations.

Flexible Call Routing

The QuadroM Gateway can make intelligent routing decision depending on the type of call and destination digits. This allows the gateway to make Least Cost Routing decisions on the fly. Allowing legacy or pure IP solution to take advantage of the VoIP savings and flexibility.

The Power of the QuadroM

Increased call capacity
Improved sound quality
Cost effective system administration
Longer life cycle

What are Your VoIP BENEFITS?

- Simple Installation
- Cost Effective VoIP Migration
- Reliable Epygi VoIP Technology
- Cost Effective Call Routing

Telephony

Voice Features

Voice Coding G.711, G.726 (16, 24, 32, 40 Kbps), G.729, iLBC (13.33 kbit/s, 15.2 kbit/s);
(RFC 3951, ITU-T: G.711, G.726, G.729 Annex A; IETF: ITU-T Q.23, Q.24, Bellcore GR.506, GR.181; ITU-T G.168-2000, 2002; ETS_300659_1,2,3; A-law, U-law coding)
NAT traversal (both manually and STUN)
VAD, CNG, G.168 echo cancellation
Voice Transcoding

Bandwidth Requirements

Per call WAN bandwidth requirements for the following codecs (non-encrypted):

G.711	20 msec	84 kbps
G.726-16	20 msec	37 kbps
G.726-24	20 msec	45 kbps
G.726-32	20 msec	52 kbps
G.726-40	20 msec	60 kbps
G.729a	20 msec	29 kbps
iLBC	30 msec	27 kbp

PBX Features

Call statistics
Call routing
Auto Attendant
IVR system (custom AA, custom messages upload, create scenarios with EpygiXML)
T.38 fax relay and clear channel fax

Call Signaling

SIP (RFCs: 3261, 3263, 3265, 3311, 3323, 3324, 3325, 3428, 3515, 3578, 3581, 3725, 3842, 3856, 3863, 3891, 3892, 4028, 4235)
SDP (RFC 2327)
RTP (RFCs: 1889, 1890, 2833, 3389, 3550, 3551, 3555, draft-ietf-avt-rfc2833bis-05, draft-ietf-avt-rtp-ilbc-05), H.323 (ITU-T: H.225.0, H.235, H.245, H.323, H.450.x)
Fax over IP (ITU-T: T.4, T.30, T.38, V.17, V.21, V.27 ter, V.29)

POTS Signaling

Loop start

CCS Signaling

ITU-T: Q.921, Q.931 (DSS1), Q.932, Q.951; ETSI ETS300 102 (NET5); ECMA-143-(QSIG); SR-NWT-002120 (NI2)
NTT INS1500 for Japan
PRI switch types: DSS1, NET5, QSIG, 5ESS, NI2
NTT ins1500 DMS 100

CAS Signaling

CAS (MELCAS, ITU, ITU-T2, ITU-T: Q.400, Q.411, Q.421, Q.422, Q.440-Q.442, Q.450-Q.452, Q.454, Q.455, Q.457, Q.458, Q.460-Q.468, Q.470-Q.476)
Types: Loop Start, Ground Start; E&M Delay Dial, E&M Wink Start, E&M Immediate Start, E&M FGD
R2 DTMF, R2 compelled, R2 non-compelled, R2 compelled with ANI, R2 non-compelled with ANI; R2 Parameters for Brazil, Mexico etc.)
ANSI T1.403.02-199, T1.403.02a-2001

DTMF

In band & out of band signaling supp

Connectivity

Premise Connections

1 short-loop FXS port (RJ11)
1 Ethernet 10/100BASE TX port to connect a PC for configuration purposes (RJ45)

Uplink Connection

2 E1/T1 ports to the Central Office (RJ45)
1 Ethernet 10/100BASE TX (RJ45)

Billing

Radius Client (RFCs: 2865, 2866)

Internet

STUN/NAT traversal (RFC 3489)

Firewall security via:

NAT (Network Address Translation)
Policy and service-based filtering
DHCP server on the LAN side
DHCP client on the WAN side
DNS server with forwarding functionality
SNTP (Simple Network Time Protocol) server/client for computer clock synchronization
PPPoE connection to the ISP with PAP/(MS)CHAP authentication
IP DIFFSERV for QoS
DNS support
Port forwarding
Port translation
VPN(IPSec/PPTP/L2TP) support

System

Management

WEB interface accessible from LAN and WAN (HTTP/HTTPS), the WAN management access can be switched off
User rights management service
Password control
SNMP Support
Remote diagnostics & software upgrade
Download/restore configuration
Reset button with factory reset option
Custom Language Pack
3PCC - API (ActiveX) for developing programs which will control and manage calls to/from Quadro (for hotels, medical/law offices, consulate etc.)

Diagnostics/Testing

LEDs: Busy, Info, Fault, LAN, WAN, Line
E1/T1 diagnostics, Loop settings
Remote testing
Power-up diagnostics

Environmental

Physical Dimensions

Desktop devices, wall-mountable:
Measurements: 10.04" x 8.27" x 1.77"
(25.5 x 21.0 x 4.5 cm)

Weight: 22.6 ounces (640 g)

Rack-mountable devices:
Measurements: 19" x 7.56" x 1.77"
(48.0 x 19.2 x 4.5 cm)

Weight: 2.47 lbs. (1090 g)

Conditions

41°F - 104°F (5°C - 40°C) operating temperature

41°F - 140°F (5°C - 60°C) storage temperature


5% - 90% non-condensing humidity

Power Supply

Input 100 - 240 VAC; 50/60 Hz; 0.5 A
Output 12.0 VDC; 1.5 A

Regulatory Compliance

EMC: CFR 47, PART 15, SUBPART B CLASS A
Telecom: TBR12/TBR13; AS/ACIF

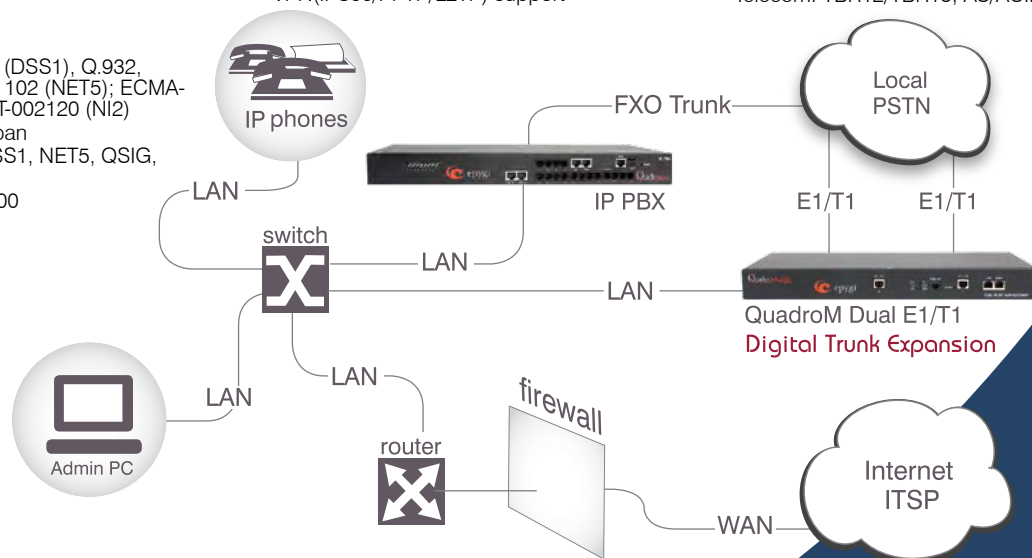

Epygi Technologies, Ltd.
6900 Dallas Parkway, Suite 850
Plano, Texas 75024
Tel/Fax: (+1)972.692.1166
Web: www.epygi.com
E-mail: sales@epygi.com